


Variante A Typ 3

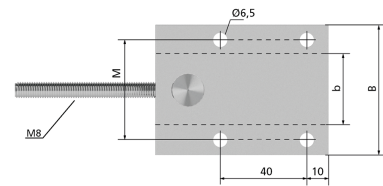

Variante A Typ 3

belt width b	Belt type	B [mm]	L [mm]	M [mm]	m <sub>1</sub> [mm]	a [mm]	c [mm]	h	H [mm]
25	T5	50	80	38	10.25	-	-	-	18.5
32	T5	60	80	46	10.25	-	-	-	18.5
50	T5	75	80	62	10.25	-	-	-	18.5
25	T10	50	80	38	11.25	-	-	-	19.5
32	T10	60	80	46	11.25	-	-	-	19.5
50	T10	75	80	62	11.25	-	-	-	19.5
25	AT5	50	80	38	10.75	-	-	-	19
32	AT5	60	80	46	10.75	-	-	-	19
50	AT5	75	80	62	10.75	-	-	-	19
25	ATL5	50	80	38	10.75	-	-	-	19
32	ATL5	60	80	46	10.75	-	-	-	19
50	ATL5	75	80	62	10.75	-	-	-	19
25	AT10	50	80	38	11.25	-	-	-	19.5
32	AT10	60	80	46	11.25	-	-	-	19.5
50	AT10	75	80	62	11.25	-	-	-	19.5
25	AT10 MOV	50	80	38	11.25	-	-	-	19.5
32	AT10 MOV	60	80	46	11.25	-	-	-	19.5
25	ATL10	50	80	38	11	-	-	-	19.5
32	ATL10	60	80	46	11	-	-	-	19.5
32	BATK10	60	80	46	11.25	-	-	-	19.5
50	BATK10	75	80	62	11.25	-	-	-	19.5

Mounting instructions	belt width b=25 mm	belt width b=32 mm	belt width b=50 mm	belt width b=75 mm	belt width b=100 mm	belt width b=150 mm
Fastening screws	Cheese head screws ISO 4762, 4xM6 - 8.8 zincd (SW5)	Cheese head screws ISO 4762, 4xM6 - 8.8 zincd (SW5)	Cheese head screws ISO 4762, 4xM6 - 8.8 zincd (SW5)	-	-	-
Recommend tightness moment of the fastening screws MA	10 Nm	10 Nm	10 Nm	-	-	-
Tightening moment for generation of tension force MA	10 Nm	10 Nm	10 Nm	-	-	-
Admissible force of the tension plates Fad <sub>m</sub>	29580 N	36540 N	34000 N	-	-	-